ED
Sprung Core

Material : 1.2101
Hardness : 45±3 HRC

It's function is same as sling ejector pin MP, just the released elasticity is smaller from its bottom, easy to installed, just has only one installation aperture, the height is easy to adjust, with smaller process tolerance.

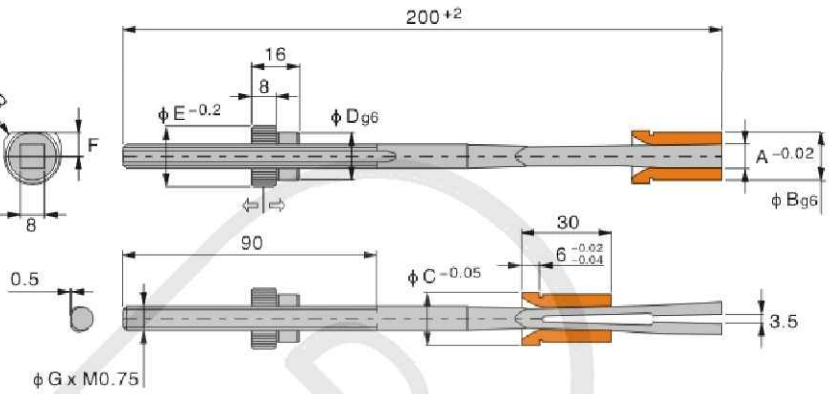

Type	A	ϕB	ϕC	ϕD	ϕE	ϕG	F	R	H
ED.068200	6	12	14	10	14	6	6	3	10
ED.088200	8	14	16	12	16	8	7	3	12
ED.108200	10	16	18	14	18	8	8	4	14
ED.128200	12	16	18	16	20	8	8	4	15

Order: Type No. x Pcs
ED.068200 x 10

Example

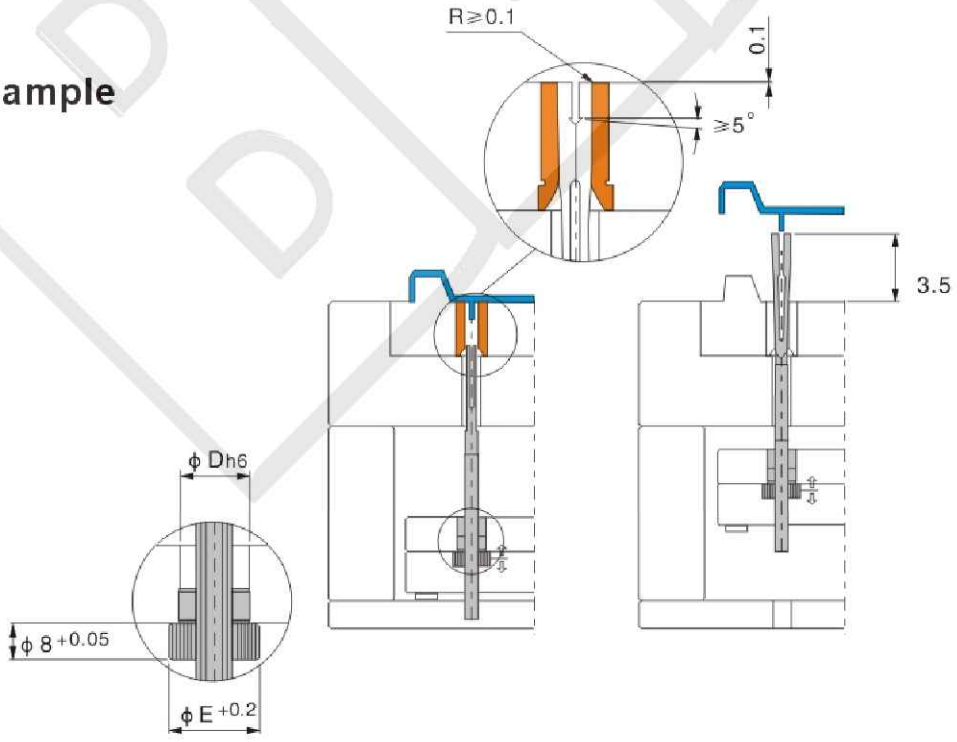

BRAHMADEVI ENGINEERING PRODUCTS
Regd. Office :19, Martand Chowk, INDORE - 452 007 (M.P.) INDIA
Ph. : +91 - 731 - 2720243, Fax : +91 - 731 - 2721554
E-mail : ishan1809@yahoo.com, ruchir@diespares.com **Website :** www.diespares.com